



HIGH TORQUE HYBRID STEPPING MOTOR SPECIFICATIONS

General specifications		Electrical specifications	
Step Angle (°)	1.8	Rated Voltage (V)	7.4
Temperature Rise (°C)	80 Max (rated current, 2 phase on)	Rated Current (A)	0.28
Ambient temperature (°C)	-20~+50	Resistance Per Phase ($\pm 10\%$)	26 (25°C)
Number of Phase	2	Inductance Per Phase ($\pm 20\%$)	19.2
Insulation Resistance	100M Ω Min (500VDC)	Holding Torque (Kg. cm)	0.65
Insulation Class	Class B	Detent Torque (g. cm)	60
Max. radial force (N)	28 (20mm from the flange)	Rotor Inertia (g. cm ²)	10
Max. axial force (N)	10	Weight (Kg)	0.11

● Pull out torque curve:


VOLTAGE: 24VDC, CONSTANT CURRENT: 0.28A, HALF STEP

● Wiring Diagram:

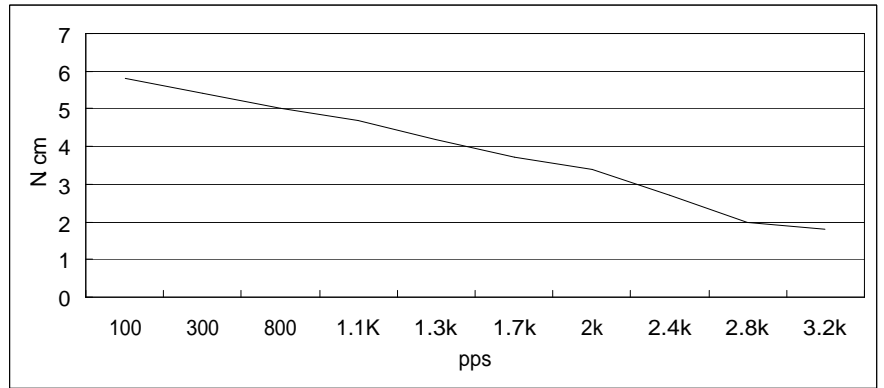

● Dimensions:

(unit=mm)

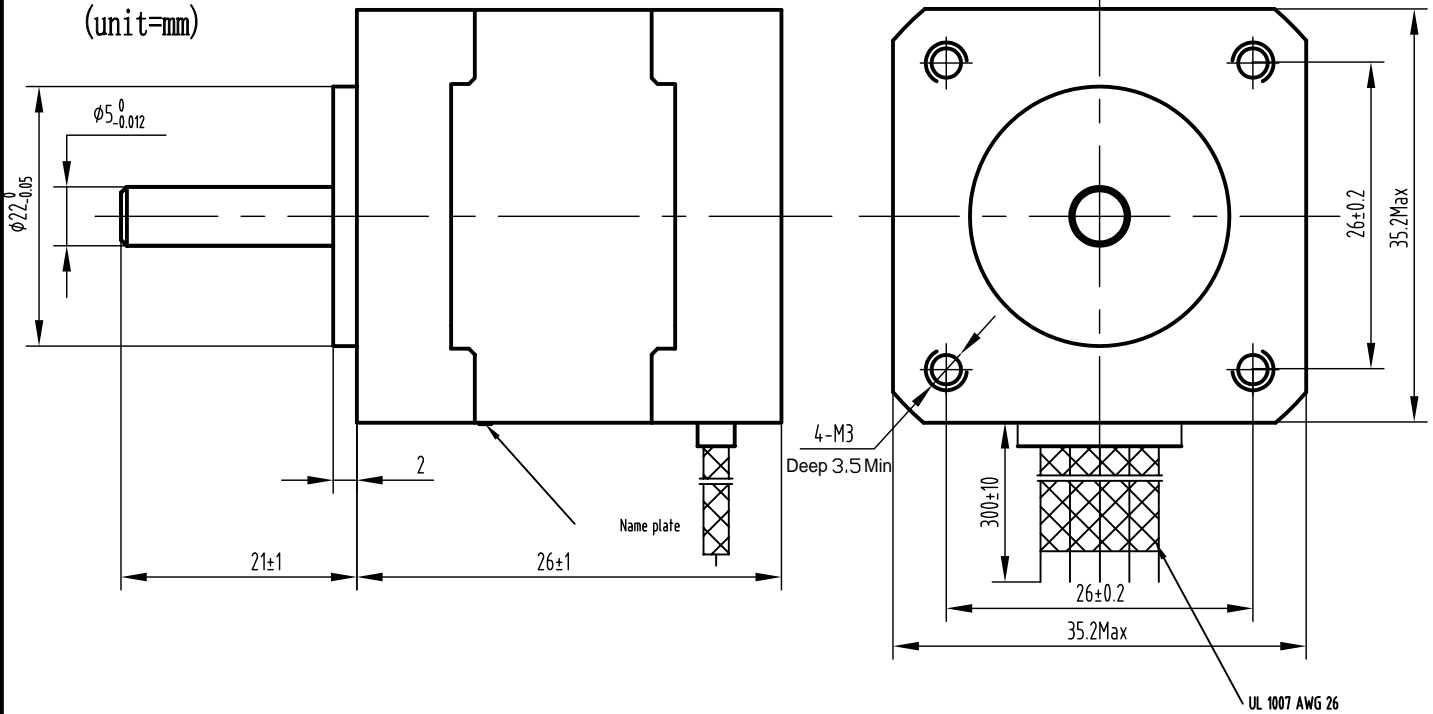

⚠						SY35ST26-0284A	TECHNICAL CONDITIONS
REV	REVISIONS	DESCRIPTION	BY	DATE	CHANGZHOU SONGYANG MACHINERY & ELECTRONICS NEW TECHNIC INSTITUTE		
DRAW							
CHECK							
APPROVE							